


ISO-KF Blanking Flange



- Pressure range: $1 \cdot 10^{-8}$ mbar to 1.5 bar (elastomer seal)
- $1 \cdot 10^{-9}$ mbar to 1.5 bar 304 & 316L (metal seal)

Dimensions

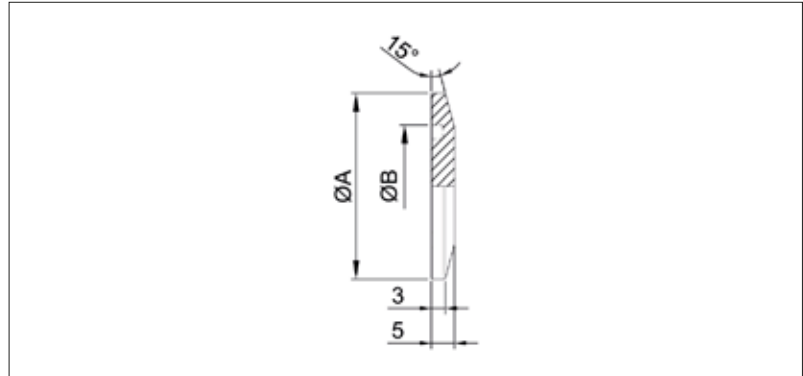

Aluminium EN AW-6082/3.2315

- Temperature Range: -196 to 150 C°

Size (DN)	A (mm)	B (mm)	Order No
10	30	12.2	VC1FLD1AL010
16	30	17.2	VC1FLD1AL016
20	40	22.2	VC1FLD1AL020
25	40	26.2	VC1FLD1AL025
32	55	34.2	VC1FLD1AL032
40	55	41.2	VC1FLD1AL040
50	75	52.2	VC1FLD1AL050

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Size (DN)	A (mm)	B (mm)	Order No
10	30	12.2	VC1FLD1SS010
16	30	17.2	VC1FLD1SS016
20	40	22.2	VC1FLD1SS020
25	40	26.2	VC1FLD1SS025
32	55	34.2	VC1FLD1SS032
40	55	41.2	VC1FLD1SS040
50	75	52.2	VC1FLD1SS050

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

Size (DN)	A (mm)	B (mm)	Order No
10	30	12.2	VC1FLD2SS010
16	30	17.2	VC1FLD2SS016
20	40	22.2	VC1FLD2SS020
25	40	26.2	VC1FLD2SS025
32	55	34.2	VC1FLD2SS032
40	55	41.2	VC1FLD2SS040
50	75	52.2	VC1FLD2SS050