



ISO-KF Full Flange



- Pressure range: $1 \cdot 10^{-8}$ mbar to 1.5 bar (elastomer seal)
- $1 \cdot 10^{-9}$ mbar to 1.5 bar 304 & 316L (metal seal)
- Custom lengths available upon request

Dimensions

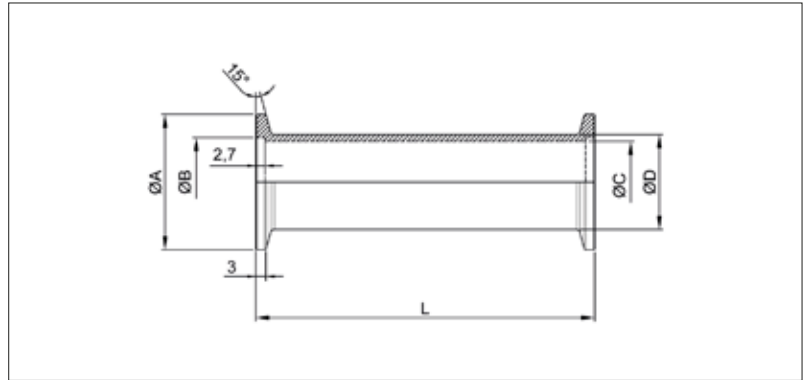

Aluminium EN AW-6082/3.2315

- Temperature Range: -196 to 150 C°

Size (DN)	A (mm)	B (mm)	C (mm)	D (mm)	L (mm)	Order No
10	30	12.2	10	14	60	VC1FLC1AL010-60
16	30	17.2	16	20	80	VC1FLC1AL016-80
20	40	22.2	20	25	100	VC1FLC1AL020-100
25	40	26.2	24	28	100	VC1FLC1AL025-100
32	55	34.2	34	38	130	VC1FLC1AL032-130
40	55	41.2	40.5	44.5	130	VC1FLC1AL040-130
50	75	52.2	50.6	57	140	VC1FLC1AL050-140

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Size (DN)	A (mm)	B (mm)	C (mm)	D (mm)	L (mm)	Order No
10	30	12.2	10	14	60	VC1FLC1SS010-60
16	30	17.2	16	20	80	VC1FLC1SS016-80
20	40	22.2	20	25	100	VC1FLC1SS020-100
25	40	26.2	24	28	100	VC1FLC1SS025-100
32	55	34.2	34	38	130	VC1FLC1SS032-130
40	55	41.2	40.5	44.5	130	VC1FLC1SS040-130
50	75	52.2	50.6	57	140	VC1FLC1SS050-140

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

Size (DN)	A (mm)	B (mm)	C (mm)	D (mm)	L (mm)	Order No
10	30	12.2	10	14	60	VC1FLC2SS010-60
16	30	17.2	16	20	80	VC1FLC2SS016-80
20	40	22.2	20	25	100	VC1FLC2SS020-100
25	40	26.2	24	28	100	VC1FLC2SS025-100
32	55	34.2	34	38	130	VC1FLC2SS032-130
40	55	41.2	40.5	44.5	130	VC1FLC2SS040-130
50	75	52.2	50.6	57	140	VC1FLC2SS050-140