

CF Swagelok® VCR Adapter, Female



Swagelok® VCR adapter


Pressure range: 1 · 10⁻¹¹ mbar to ambient pressure

Tightness: ≤ 1 · 10⁻¹⁰ mbar l/s

Materials: Flange: Stainless steel 304L; VCR adapter: 316L/1.4404

Temperature range: -196 to 300 °C

Dimensions

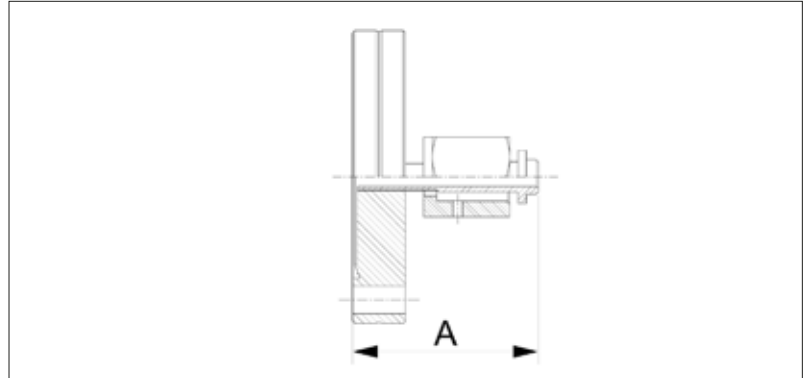

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Flange Size (DN)	A (mm)	VCR Connection	Order No
16	44	1/4"	VC4ADC1SS016-03-44
16	47	1/2"	VC4ADC1SS016-05-47
40	44	1/4"	VC4ADC1SS040-03-44
40	47	1/2"	VC4ADC1SS040-05-47

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

Flange Size (DN)	A (mm)	VCR Connection	Order No
16	44	1/4"	VC4ADC2SS016-03-44
16	47	1/2"	VC4ADC2SS016-05-47
40	44	1/4"	VC4ADC2SS040-03-44
40	47	1/2"	VC4ADC2SS040-05-47