


ISO-K Flexible Hose



- Flange connection length: 30 mm
- Custom lengths on request
- Pressure range: $1 \cdot 10^{-8}$ mbar to 500 mbar
- Materials:
Stainless Steel 304/1.4301
Stainless Steel 316L/1.4404

Dimensions

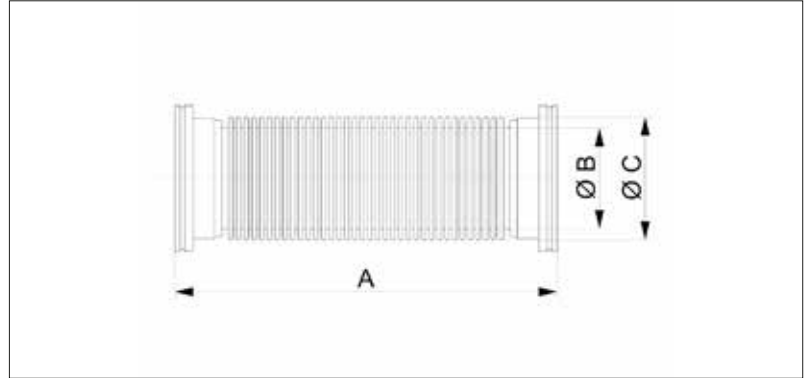

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Flange Size (DN)	A (mm)	B (mm)	C (mm)	Bend radius, unique movement (mm)	Over pressure max. (hPa)	Order No
63	250	65	80	90	500	VC2HSA1SS063-250
63	500	65	80	90	500	VC2HSA1SS063-500
63	750	65	80	90	500	VC2HSA1SS063-750
63	1000	65	80	90	500	VC2HSA1SS063-1000
63	1500	65	80	90	500	VC2HSA1SS063-1500
100	250	100	119	131	300	VC2HSA1SS100-250
100	500	100	119	131	300	VC2HSA1SS100-500
100	750	100	119	131	300	VC2HSA1SS100-750
100	1000	100	119	131	300	VC2HSA1SS100-1000
100	1500	100	119	131	300	VC2HSA1SS100-1500
160	250	150	173	216	100	VC2HSA1SS160-250
160	500	150	173	216	100	VC2HSA1SS160-500
160	750	150	173	216	100	VC2HSA1SS160-750
160	1000	150	173	216	100	VC2HSA1SS160-1000
160	1500	150	173	216	100	VC2HSA1SS160-1500

Stainless Steel 316L/1.4404

• Temperature range: -196 to 350 °C

Flange Size (DN)	A (mm)	B (mm)	C (mm)	Bend radius, unique movement (mm)	Over pressure max. (hPa)	Order No
63	250	65	80	90	500	VC2HSA2SS063-250
63	500	65	80	90	500	VC2HSA2SS063-500
63	750	65	80	90	500	VC2HSA2SS063-750
63	1000	65	80	90	500	VC2HSA2SS063-1000
63	1500	65	80	90	500	VC2HSA2SS063-1500
100	250	100	119	131	300	VC2HSA2SS100-250
100	500	100	119	131	300	VC2HSA2SS100-500
100	750	100	119	131	300	VC2HSA2SS100-750
100	1000	100	119	131	300	VC2HSA2SS100-1000
100	1500	100	119	131	300	VC2HSA2SS100-1500
160	250	150	173	216	100	VC2HSA2SS160-250
160	500	150	173	216	100	VC2HSA2SS160-500
160	750	150	173	216	100	VC2HSA2SS160-750
160	1000	150	173	216	100	VC2HSA2SS160-1000
160	1500	150	173	216	100	VC2HSA2SS160-1500