

ISO-K to ISO-F Adapter Flange




- Pressure range: $1 \cdot 10^{-8}$ mbar to 500 mbar over pressure (elastomer seal)
 $1 \cdot 10^{-9}$ mbar to 500 mbar over pressure (metal seal)

• Materials:

Stainless Steel 304/1.4301

Stainless Steel 316L/1.4404

Dimensions

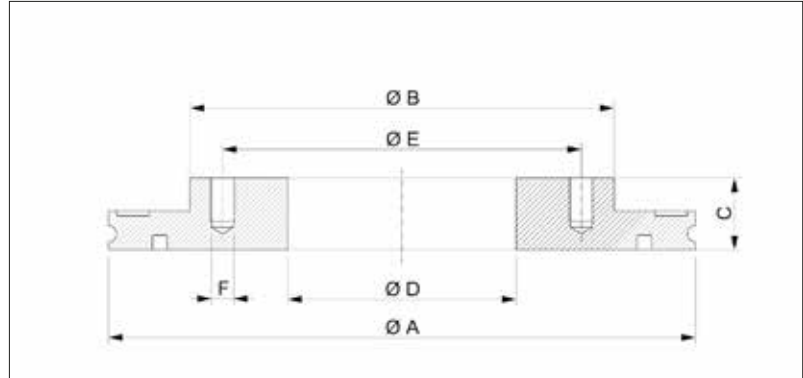

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Size (DN)	Nominal diameter reduced	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F	Order No
160	63	180	130	22	70	110	M8	VC2FLF1SS160-063
160	100	180	165	22	102	145	M8	VC2FLF1SS160-100
200	100	240	165	20	102	145	M8	VC2FLF1SS200-100
200	160	240	225	26	153	200	M10	VC2FLF1SS200-160
250	160	290	225	22	153	200	M10	VC2FLF1SS250-160

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

Size (DN)	Nominal diameter reduced	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F	Order No
160	63	180	130	22	70	110	M8	VC2FLF2SS160-063
160	100	180	165	22	102	145	M8	VC2FLF2SS160-100
200	100	240	165	20	102	145	M8	VC2FLF2SS200-100
200	160	240	225	26	153	200	M10	VC2FLF2SS200-160
250	160	290	225	22	153	200	M10	VC2FLF2SS250-160