


ISO-KF Adapter for Pvc Hose



- Material: Aluminium EN AW 6082 and Stainless Steel 304/1.4301, Stainless Steel 316L/1.4404
- For connecting a PVC hose with embedded spring or a CR sleeve

Dimensions

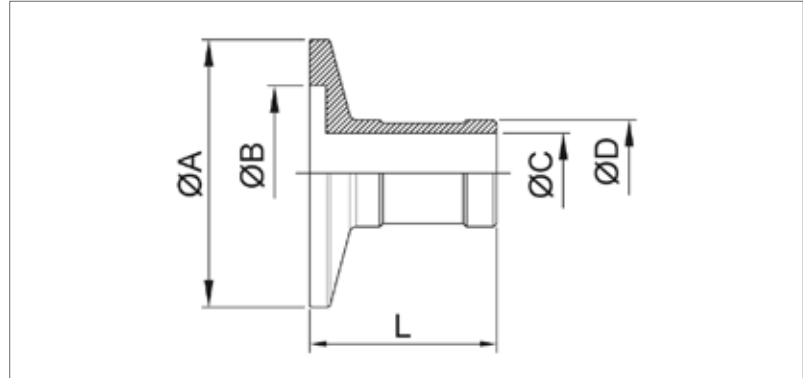

Aluminium EN AW-6082 T6/3.2315

- Temperature Range: -196 to 150 C°

Size (DN)	A (mm)	B (mm)	C (mm)	D (mm)	L (mm)	Order No
10	30	12.2	9	14	40	VC1ADB1AL010-14-40
16	30	17.2	12	16	28	VC1ADB1AL016-16-28
16	30	17.2	16	20	40	VC1ADB1AL016-20-40
25	40	26.2	12	16	28	VC1ADB1AL025-16-28
25	40	26.2	15	20	40	VC1ADB1AL025-20-40
25	40	26.2	21	25	40	VC1ADB1AL025-25-40
40	55	41.2	40	45	32	VC1ADB1AL040-45-32
40	55	41.2	22	26	40	VC1ADB1AL040-26-40
40	55	41.2	37	41	40	VC1ADB1AL040-41-40
50	75	52.2	45	50	60	VC1ADB1AL050-50-60

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Size (DN)	A (mm)	B (mm)	C (mm)	D (mm)	L (mm)	Order No
16	30	17.2	12	16	28	VC1ADB1SS016-16-28
25	40	26.2	21	25	28	VC1ADB1SS025-25-28
40	55	41.2	40	45	32	VC1ADB1SS040-45-32
50	75	52.2	45	50	60	VC1ADB1SS050-50-60

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

Size (DN)	A (mm)	B (mm)	C (mm)	D (mm)	L (mm)	Order No
16	30	17.2	12	16	28	VC1ADB2SS016-16-28
25	40	26.2	21	25	28	VC1ADB2SS025-25-28
40	55	41.2	40	45	32	VC1ADB2SS040-45-32
50	75	52.2	45	50	60	VC1ADB2SS050-50-60