

# ISO-KF Chain Clamp



- Quick opening and closing of clamp
- Suitable for use with elastomer and metallic seals
- Hand grip: Stainless steel
- Especially for UHV applications
- Cryo applications
- Aluminium

Links constructed of pressure die-cast Aluminium alloy


Over pressure max.: 500 mbar

- Stainless Steel

Food and Beverage applications

Pressure range:  $1 \cdot 10^{-11}$  hPa to 300 bar over pressure (metal seal)

## Dimensions

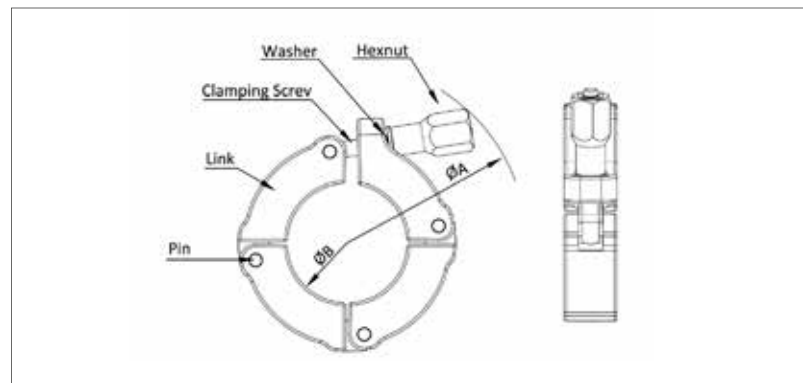

### Aluminium EN AC-4710

- Temperature Range: -196 to 200 °C

Size (DN)	A (mm)	B (mm)	Torque (Nm) (Alu)	Torque (Nm) (Copper)	Torque (Nm)(Nickel)	Links	Order No
10/16	95	21	2	3.5	6	3	VC1CLH3AL016
20/25	120	30	2.5	5	8	4	VC1CLH3AL025
32/40	135	45	3	6	10	4	VC1CLH3AL040
50	150	60	4.5	8.5	12	5	VC1CLH3AL050

### Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Size (DN)	A (mm)	B (mm)	Torque (Nm) (Alu)	Torque (Nm) (Copper)	Torque (Nm) (Nickel)	Links	Order No
10/16	95	21	2	3.5	6	3	VC1CLH1SS016
20/25	120	30	2.5	5	8	4	VC1CLH1SS025
32/40	135	45	3	6	10	4	VC1CLH1SS040
50	150	60	4.5	8.5	12	5	VC1CLH1SS050

### Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

Size (DN)	A (mm)	B (mm)	Torque (Nm) (Alu)	Torque (Nm) (Copper)	Torque (Nm) (Nickel)	Links	Order No
10/16	95	21	2	3.5	6	3	VC1CLH2SS016
20/25	120	30	2.5	5	8	4	VC1CLH2SS025
32/40	135	45	3	6	10	4	VC1CLH2SS040
50	150	60	4.5	8.5	12	5	VC1CLH2SS050