

ISO-KF Conical Reducer



- Stainless Steel 304/1.4301

Pressure range: $1 \cdot 10^{-8}$ mbar to 500 mbar over pressure (elastomer seal)


$1 \cdot 10^{-9}$ mbar to 500 mbar over pressure (metal seal)

- Stainless Steel 316L/1.4404

Pressure range: $1 \cdot 10^{-8}$ mbar to 500 mbar over pressure (elastomer seal)

$1 \cdot 10^{-9}$ mbar to 500 mbar over pressure (metal seal)

Dimensions

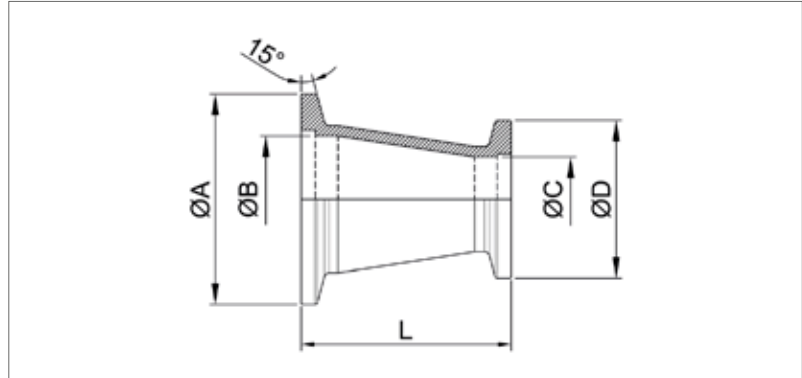

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Flange Size (DN)	Reducer Flange Size (DN)	A (mm)	B (mm)	C (mm)	D (mm)	L (mm)	Order No
25	16	40	24	16	30	28	VC1FTB1SS025-016-28
25	16	40	24	16	30	40	VC1FTB1SS025-016-40
40	16	55	24	16	30	28	VC1FTB1SS040-016-28
40	16	55	24	16	30	40	VC1FTB1SS040-016-40
40	25	55	40	24	40	28	VC1FTB1SS040-025-28
40	25	55	40	24	40	40	VC1FTB1SS040-025-40
50	16	75	50	16	30	40	VC1FTB1SS050-016-40
50	25	75	50	24	40	28	VC1FTB1SS050-025-28
50	25	75	50	24	28	40	VC1FTB1SS050-025-40
50	40	75	50	40	55	28	VC1FTB1SS050-040-28
50	40	75	50	40	55	40	VC1FTB1SS050-040-40

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

Flange Size (DN)	Reducer Flange Size (DN)	A (mm)	B (mm)	C (mm)	D (mm)	L (mm)	Order No
25	16	40	24	16	30	28	VC1FTB2SS025-016-28
25	16	40	24	16	30	40	VC1FTB2SS025-016-40
40	16	55	24	16	30	28	VC1FTB2SS040-016-28
40	16	55	24	16	30	40	VC1FTB2SS040-016-40
40	25	55	40	24	40	28	VC1FTB2SS040-025-28
40	25	55	40	24	40	40	VC1FTB2SS040-025-40
50	16	75	50	16	30	40	VC1FTB2SS050-016-40
50	25	75	50	24	40	28	VC1FTB2SS050-025-28
50	25	75	50	24	28	40	VC1FTB2SS050-025-40
50	40	75	50	40	55	28	VC1FTB2SS050-040-28
50	40	75	50	40	55	40	VC1FTB2SS050-040-40