


ISO-KF Flexible Hose



- Flange connection length: 15 mm
- Custom lengths on request
- Pressure range: $1 \cdot 10^{-8}$ mbar to 500 mbar
- Materials:
Stainless Steel 316L/1.4404

Dimensions

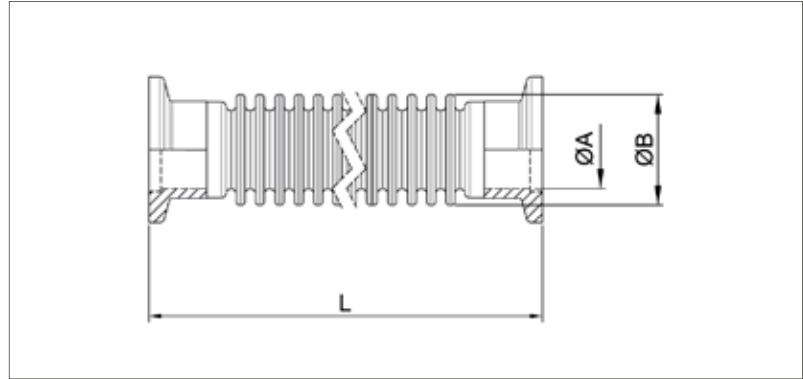

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Size (DN)	L (mm)	A (mm)	B (mm)	Bending radius movement (mm)	One-Time Bending Radius. Frequent Movement (mm)	Order No
10	250	10	16	17	100	VC1HSA1SS010-250
10	500	10	16	17	100	VC1HSA1SS010-500
10	750	10	16	17	100	VC1HSA1SS010-750
10	1000	10	16	17	100	VC1HSA1SS010-1000
10	1500	10	16	17	100	VC1HSA1SS010-1500
16	250	16	23	26	140	VC1HSA1SS016-250
16	500	16	23	26	140	VC1HSA1SS016-500
16	750	16	23	26	140	VC1HSA1SS016-750
16	1000	16	23	26	140	VC1HSA1SS016-1000
16	1500	16	23	26	140	VC1HSA1SS016-1500
25	250	24	33	38	180	VC1HSA1SS025-250
25	500	24	33	38	180	VC1HSA1SS025-500
25	750	24	33	38	180	VC1HSA1SS025-750
25	1000	24	33	38	180	VC1HSA1SS025-1000
25	1500	24	33	38	180	VC1HSA1SS025-1500
40	250	40.5	52	59	240	VC1HSA1SS040-250
40	500	40.5	52	59	240	VC1HSA1SS040-500
40	750	40.5	52	59	240	VC1HSA1SS040-750
40	1000	40.5	52	59	240	VC1HSA1SS040-1000
40	1500	40.5	52	59	240	VC1HSA1SS040-1500
50	250	50	63	72	280	VC1HSA1SS050-250
50	500	50	63	72	280	VC1HSA1SS050-500
50	750	50	63	72	280	VC1HSA1SS050-750
50	1000	50	63	72	280	VC1HSA1SS050-1000
50	1500	50	63	72	280	VC1HSA1SS050-1500

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

Size (DN)	L (mm)	A (mm)	B (mm)	Bending radius movement (mm)	One-Time Bending Radius. Frequent Movement (mm)	Order No
10	250	10	16	17	100	VC1HSA2SS010-250
10	500	10	16	17	100	VC1HSA2SS010-500
10	750	10	16	17	100	VC1HSA2SS010-750
10	1000	10	16	17	100	VC1HSA2SS010-1000
10	1500	10	16	17	100	VC1HSA2SS010-1500
16	250	16	23	26	140	VC1HSA2SS016-250
16	500	16	23	26	140	VC1HSA2SS016-500
16	750	16	23	26	140	VC1HSA2SS016-750
16	1000	16	23	26	140	VC1HSA2SS016-1000
16	1500	16	23	26	140	VC1HSA2SS016-1500
25	250	24	33	38	180	VC1HSA2SS025-250
25	500	24	33	38	180	VC1HSA2SS025-500
25	750	24	33	38	180	VC1HSA2SS025-750
25	1000	24	33	38	180	VC1HSA2SS025-1000
25	1500	24	33	38	180	VC1HSA2SS025-1500
40	250	40.5	52	59	240	VC1HSA2SS040-250
40	500	40.5	52	59	240	VC1HSA2SS040-500
40	750	40.5	52	59	240	VC1HSA2SS040-750
40	1000	40.5	52	59	240	VC1HSA2SS040-1000
40	1500	40.5	52	59	240	VC1HSA2SS040-1500
50	250	50	63	72	280	VC1HSA2SS050-250
50	500	50	63	72	280	VC1HSA2SS050-500
50	750	50	63	72	280	VC1HSA2SS050-750
50	1000	50	63	72	280	VC1HSA2SS050-1000
50	1500	50	63	72	280	VC1HSA2SS050-1500