

ISO-KF Reducer Cross



- Stainless Steel 304/1.4301

Pressure range: $1 \cdot 10^{-8}$ mbar to 500 mbar over pressure (elastomer seal)


$1 \cdot 10^{-9}$ mbar to 500 mbar over pressure (metal seal)

- Stainless Steel 316L/1.4404

Pressure range: $1 \cdot 10^{-8}$ mbar to 500 mbar over pressure (elastomer seal)

$1 \cdot 10^{-9}$ mbar to 500 mbar over pressure (metal seal)

Dimensions

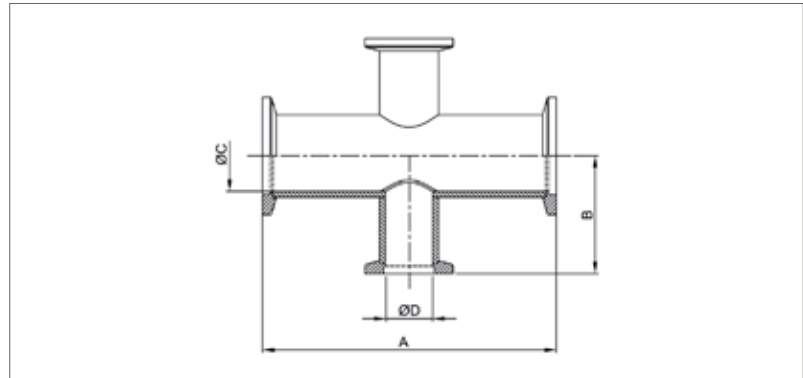

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Size (DN)	Size Reducer (DN)	A (mm)	B (mm)	C (mm)	D (mm)	Order No
25	16	100	40	24	16	VC1FTR1SS025-016-100
40	16	130	40	40.5	16	VC1FTR1SS040-016-130
40	25	130	50	40.5	24	VC1FTR1SS040-025-130
50	16	140	40	50	16	VC1FTR1SS050-016-140
50	25	140	50	50	24	VC1FTR1SS050-025-140
50	40	140	65	50	40	VC1FTR1SS050-040-140

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

Size (DN)	Size Reducer (DN)	A (mm)	B (mm)	C (mm)	D (mm)	Order No
25	16	100	40	24	16	VC1FTR2SS025-016-100
40	16	130	40	40.5	16	VC1FTR2SS040-016-130
40	25	130	50	40.5	24	VC1FTR2SS040-025-130
50	16	140	40	50	16	VC1FTR2SS050-016-140
50	25	140	50	50	24	VC1FTR2SS050-025-140
50	40	140	65	50	40	VC1FTR2SS050-040-140