


## CF Full Flange



- One fixed and one rotatable flanges
- Pressure range:  $1 \cdot 10^{-12}$  mbar to ambient pressure
- Custom lengths available upon request
- Tube surface: Glass bead blasted (polished version on request)
- Tightness:  $\leq 1 \cdot 10^{-10}$  mbar l/s
- Bake out range is up to 450°C

### Dimensions

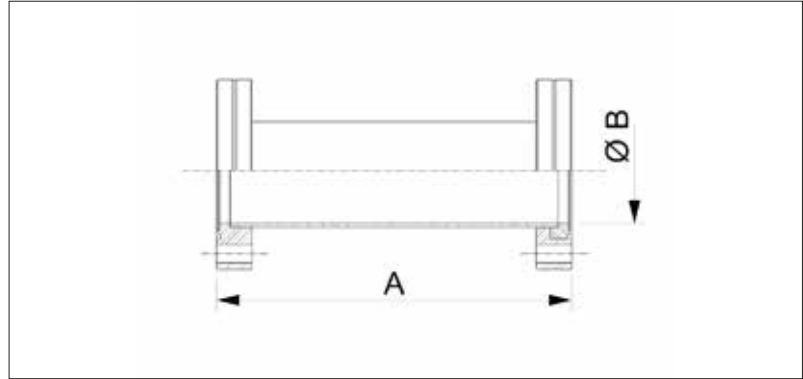

### Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C
- Flange material: SS304 / 1.4301
- Tube material: SS304 / 1.4301

| Size (DN) | Tube Dimension (mm) | A (mm) | B (mm) | Order No         |
|-----------|---------------------|--------|--------|------------------|
| 16        | 18x1                | 76     | 16     | VC4FLE1SS016-76  |
| 40        | 40x1,5              | 126    | 37     | VC4FLE1SS040-126 |
| 63        | 70x2                | 210    | 66     | VC4FLE1SS063-210 |
| 100       | 108x2               | 270    | 104    | VC4FLE1SS100-270 |
| 160       | 159x2               | 334    | 155    | VC4FLE1SS160-334 |

### Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C
- Flange material: SS316L / 1.4404
- Tube material: SS316L / 1.4404

| Size (DN) | Tube Dimension (mm) | A (mm) | B (mm) | Order No         |
|-----------|---------------------|--------|--------|------------------|
| 16        | 18x1                | 76     | 16     | VC4FLE2SS016-76  |
| 40        | 40x1,5              | 126    | 37     | VC4FLE2SS040-126 |
| 63        | 70x2                | 210    | 66     | VC4FLE2SS063-210 |
| 100       | 108x2               | 270    | 104    | VC4FLE2SS100-270 |
| 160       | 159x2               | 334    | 155    | VC4FLE2SS160-334 |