


ISO-K/F O-ring

- Various types of O-ring seals are available.



Dimensions

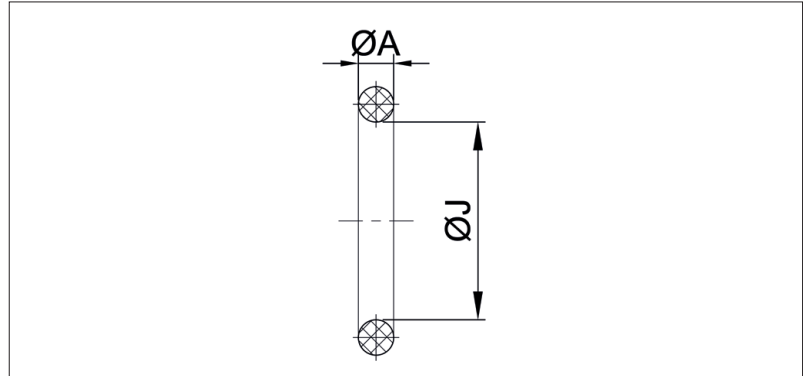

FKM

- Temperature range: -196 to 350 °C

Size (DN)	J (mm)	ØA(mm)	Order No
63	76	5,33	VCA07B1EL063
80	88,27	5,33	VCA07B1EL080
100	107	5,33	VCA07B1EL100
160	158	5,33	VCA07B1EL160
200	209	5,33	VCA07B1EL200
250	253	5,33	VCA07B1EL250
320	317	7	VCA07C1EL320
400	405	7	VCA07C1EL400
500	507	7	VCA07C1EL500
630	659	7	VCA07C1EL630

CR

- Temperature range: -196 to 350 °C

Size (DN)	J (mm)	ØA(mm)	Order No
63	76	5,33	VCA07B2EL063
80	88,27	5,33	VCA07B2EL080
100	107	5,33	VCA07B2EL100
160	158	5,33	VCA07B2EL160
200	209	5,33	VCA07B2EL200
250	253	5,33	VCA07B2EL250
320	317	7	VCA07C2EL320
400	405	7	VCA07C2EL400
500	507	7	VCA07C2EL500
630	659	7	VCA07C2EL630

NBR

- Temperature range: -25 to 120 °C

Size (DN)	J (mm)	ØA(mm)	Order No
63	76	5,33	VCA07B3EL063
80	88,27	5,33	VCA07B3EL080
100	107	5,33	VCA07B3EL100
160	158	5,33	VCA07B3EL160
200	209	5,33	VCA07B3EL200
250	253	5,33	VCA07B3EL250
320	317	7	VCA07C3EL320
400	405	7	VCA07C3EL400
500	507	7	VCA07C3EL500
630	659	7	VCA07C3EL630

EPDM

- Temperature range: -25 to 120 °C

Size (DN)	J (mm)	ØA(mm)	Order No
63	76	5,33	VCA07B4EL063
80	88,27	5,33	VCA07B4EL080
100	107	5,33	VCA07B4EL100
160	158	5,33	VCA07B4EL160
200	209	5,33	VCA07B4EL200
250	253	5,33	VCA07B4EL250
320	317	7	VCA07C4EL320
400	405	7	VCA07C4EL400
500	507	7	VCA07C4EL500
630	659	7	VCA07C4EL630

VMQ SILICON

- Temperature range: -25 to 120 °C

Size (DN)	J (mm)	ØA(mm)	Order No
63	76	5,33	VCA07B5EL063
80	88,27	5,33	VCA07B5EL080
100	107	5,33	VCA07B5EL100
160	158	5,33	VCA07B5EL160
200	209	5,33	VCA07B5EL200
250	253	5,33	VCA07B5EL250
320	317	7	VCA07C5EL320
400	405	7	VCA07C5EL400
500	507	7	VCA07C5EL500
630	659	7	VCA07C5EL630