

## ISO-K to KF Adapter Cross




### • Materials:

Stainless Steel 304/1.4301

Stainless Steel 316L/1.4404

- Pressure range:  $1 \cdot 10^{-8}$  mbar to 500 mbar over pressure (elastomer seal)  
 $1 \cdot 10^{-9}$  mbar to 500 mbar over pressure (metal seal)

### Dimensions

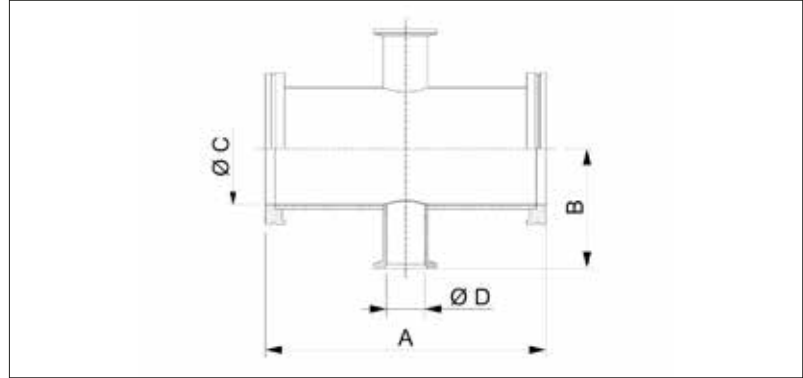

### Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

| Flange Size (DN) | Reducer Flange Size (DN) | A (mm) | B (mm) | C (mm) | D (mm) | Order No             |
|------------------|--------------------------|--------|--------|--------|--------|----------------------|
| 63               | 25                       | 176    | 75     | 70     | 24     | VC2FTK1SS063-025-176 |
| 63               | 40                       | 176    | 75     | 70     | 40.5   | VC2FTK1SS063-040-176 |
| 100              | 25                       | 216    | 100    | 102    | 24     | VC2FTK1SS100-025-216 |
| 100              | 40                       | 216    | 100    | 102    | 40.5   | VC2FTK1SS100-040-216 |
| 160              | 25                       | 276    | 125    | 153    | 24     | VC2FTK1SS160-025-276 |
| 160              | 40                       | 276    | 125    | 153    | 40.5   | VC2FTK1SS160-040-276 |

### Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

| Flange Size (DN) | Reducer Flange Size (DN) | A (mm) | B (mm) | C (mm) | D (mm) | Order No             |
|------------------|--------------------------|--------|--------|--------|--------|----------------------|
| 63               | 25                       | 176    | 75     | 70     | 24     | VC2FTK2SS063-025-176 |
| 63               | 40                       | 176    | 75     | 70     | 40.5   | VC2FTK2SS063-040-176 |
| 100              | 25                       | 216    | 100    | 102    | 24     | VC2FTK2SS100-025-216 |
| 100              | 40                       | 216    | 100    | 102    | 40.5   | VC2FTK2SS100-040-216 |
| 160              | 25                       | 276    | 125    | 153    | 24     | VC2FTK2SS160-025-276 |
| 160              | 40                       | 276    | 125    | 153    | 40.5   | VC2FTK2SS160-040-276 |