


ISO-K to KF Conical Adapter



- Other nominal diameters and dimensions on request
- Pressure range: $1 \cdot 10^{-8}$ mbar to ambient pressure (elastomer seal)
 $1 \cdot 10^{-9}$ mbar to ambient pressure (metal seal)
- Elastomer seals are available for EN AW-6082 T6/3.2315

Dimensions

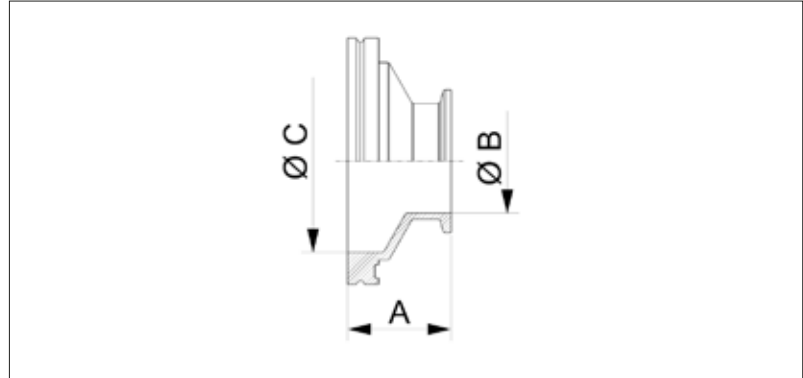

Aluminium EN AW-6082 T6/3.2315

- Temperature Range: -196 to 150 °C

ISO-K Flange Size (DN)	ISO-KF Reducer Flange Size (DN)	A (mm)	B (mm)	C (mm)	Order No
63	25	63	24	70	VC2ADE1AL063-025-63
63	40	63	40.5	70	VC2ADE1AL063-040-63
63	50	63	50	70	VC2ADE1AL063-050-63
100	40	63	40.5	102	VC2ADE1AL100-040-63
100	50	63	50	102	VC2ADE1AL100-050-63

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

ISO-K Flange Size (DN)	ISO-KF Reducer Flange Size (DN)	A (mm)	B (mm)	C (mm)	Order No
63	25	63	24	70	VC2ADE1SS063-025-63
63	40	63	40.5	70	VC2ADE1SS063-040-63
63	50	63	50	70	VC2ADE1SS063-050-63
100	40	63	40.5	102	VC2ADE1SS100-040-63
100	50	63	50	102	VC2ADE1SS100-050-63

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

ISO-K Flange Size (DN)	ISO-KF Reducer Flange Size (DN)	A (mm)	B (mm)	C (mm)	Order No
63	25	63	24	70	VC2ADE2SS063-025-63
63	40	63	40.5	70	VC2ADE2SS063-040-63
63	50	63	50	70	VC2ADE2SS063-050-63
100	40	63	40.5	102	VC2ADE2SS100-040-63
100	50	63	50	102	VC2ADE2SS100-050-63