


ISO KF 6 Way Cross



- One rotatable flange per axis
- Pressure range: $1 \cdot 10^{-12}$ mbar to ambient pressure
- Custom lengths available upon request
- Tube surface: Glass bead blasted (polished version on request)
- Tightness: $\leq 1 \cdot 10^{-10}$ mbar l/s
- Bake out range is up to 450°C

Dimensions

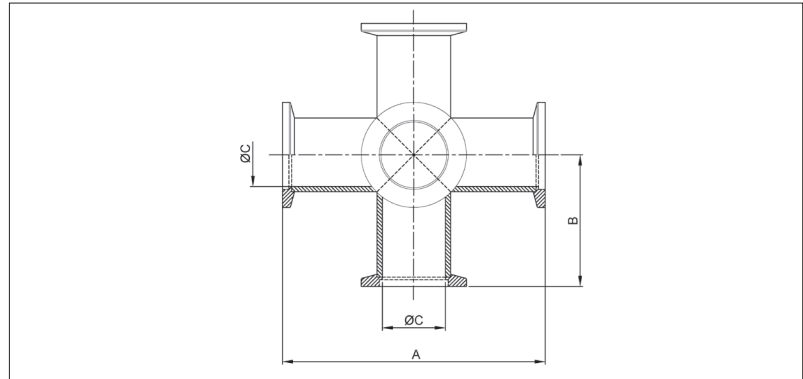

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C
- Flange material: SS304 / 1.4301
- Tube material: SS304 / 1.4301

Flange Size (DN)	A (mm)	B (mm)	C (mm)	Order No
10	60	30	10	VC1FTTU1SS010-60
16	80	40	16	VC1FTTU1SS016-80
25	100	50	24	VC1FTTU1SS025-100
40	130	65	40.5	VC1FTTU1SS040-130
50	140	70	50	VC1FTTU1SS050-140

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C
- Flange material: SS316L / 1.4404
- Tube material: SS316L / 1.4404

Flange Size (DN)	A (mm)	B (mm)	C (mm)	Order No
10	60	30	10	VC1FTTU2SS010-60
16	80	40	16	VC1FTTU2SS016-80
25	100	50	24	VC1FTTU2SS025-100
40	130	65	40.5	VC1FTTU2SS040-130
50	140	70	50	VC1FTTU2SS050-140