


ISO-KF Bolt Clamp (2-Part)



- Suitable for use with elastomer and metal seals
- Bolts: Hexagon socket, A2-70 steel
- Recommended using a screw thread lubricant
- Over pressure max.: 500 mbar

Dimensions

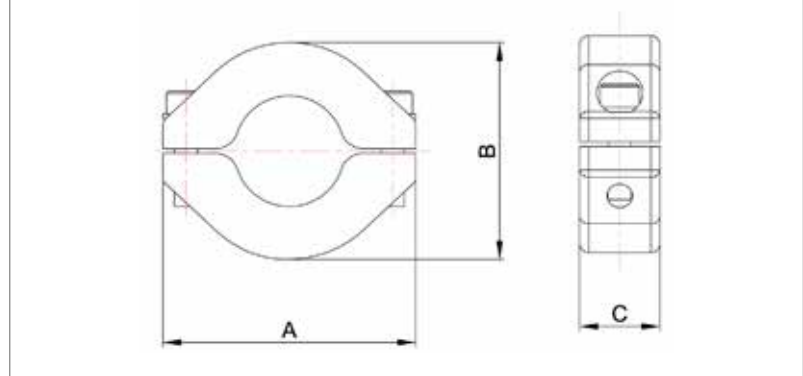

Stainless Steel 304/1.4301

- Temperature range: -196 to 300 °C

Size (DN)	A (mm)	B (mm)	C (mm)	Bolt	Order No
10/16	55	47	18	M5 x 25	VC1CLI1SS016
20/25	66	57	18	M5 x 25	VC1CLI1SS025
32/40	82	72	18	M5 x 25	VC1CLI1SS040
50	122	96	21	M5 x 25	VC1CLI1SS050

Stainless Steel 316L/1.4404

- Temperature range: -196 to 350 °C

Size (DN)	A (mm)	B (mm)	C (mm)	Bolt	Order No
10/16	55	47	18	M5 x 25	VC1CLI2SS016
20/25	66	57	18	M5 x 25	VC1CLI2SS025
32/40	82	72	18	M5 x 25	VC1CLI2SS040
50	122	96	21	M5 x 25	VC1CLI2SS050