ISO-KF Vcr Adapter Male



Swagelok® VCR adapter

Pressure range: $1 \cdot 10^{-8}$ mbar to 500 mbar over pressure (elastomer seal);

$1 \cdot 10^{-9}$ mbar to 500 mbar over pressure (metal seal)


Materials: Stainless steel 304/1.4301

Temperature range: -196 to 300 °C

Materials: Stainless steel 316L/1.4404

Temperature range: -196 to 350 °C

Dimensions

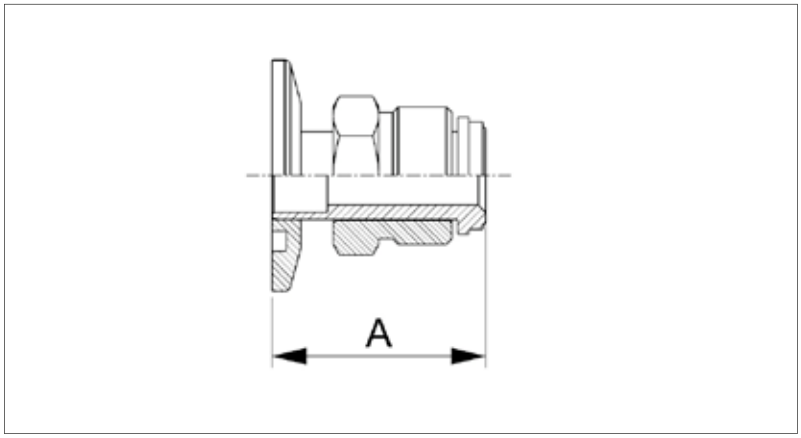

Stainless Steel 304/1.4301

• Temperature range: -196 to 300 °C

Size (DN)	A (mm)	VCR Connection	Order No
16	36	NPT 1/4"	VC1ADN1SS016-03-36
16	41	NPT 1/2"	VC1ADN1SS016-05-41
25	33	NPT 1/4"	VC1ADN1SS025-03-33
25	37	NPT 1/2"	VC1ADN1SS025-05-37
40	33	NPT 1/4"	VC1ADN1SS040-03-33
40	37	NPT 1/2"	VC1ADN1SS040-05-37

Stainless Steel 316L/1.4404

• Temperature range: -196 to 350 °C

Size (DN)	A (mm)	VCR Connection	Order No
16	36	NPT 1/4"	VC1ADN2SS016-03-36
16	41	NPT 1/2"	VC1ADN2SS016-05-41
25	33	NPT 1/4"	VC1ADN2SS025-03-33
25	37	NPT 1/2"	VC1ADN2SS025-05-37
40	33	NPT 1/4"	VC1ADN2SS040-03-33
40	37	NPT 1/2"	VC1ADN2SS040-05-37