


CF Metal Gasket



- Especially well-suited for viewports
- For single use only
- Pressure range: $1 \cdot 10^{-13}$ mbar to ambient pressure
- Materials
OFHC Copper (Oxygen-free copper Alloy 101/C10100)
Silver-Plated OFHC Copper

Dimensions

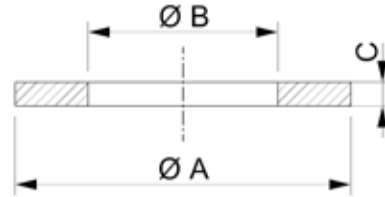

OFHC Copper (Oxygen-free)

- Temperature range: -196 to 200 °C

Size (DN)	A (mm)	B (mm)	C (mm)	Order No
16	21.3	16	2	VC4SLB1CU016
25	32.8	25.5	2	VC4SLB1CU025
40	48.2	36.6	2	VC4SLB1CU040
50	61.6	50.8	2	VC4SLB1CU050
63	82.4	63.4	2	VC4SLB1CU063
75	91.4	76.3	2	VC4SLB1CU075
100	120.5	101.6	2	VC4SLB1CU100
125	141.4	127.1	2	VC4SLB1CU125
160	171.3	152.4	2	VC4SLB1CU160
200	222.1	203.3	2	VC4SLB1CU200
250	272.9	254	2	VC4SLB1CU250
300	313.2	300	2	VC4SLB1CU300
350	376.6	356.5	2	VC4SLB1CU350

Silver-Plated OFHC Copper

- Temperature range: -196 to 450 °C

Size (DN)	A (mm)	B (mm)	C (mm)	Order No
16	21.3	16	2	VC4SLB1CU016-S
25	32.8	25.5	2	VC4SLB1CU025-S
40	48.2	36.6	2	VC4SLB1CU040-S
50	61.6	50.8	2	VC4SLB1CU050-S
63	82.4	63.4	2	VC4SLB1CU063-S
75	91.4	76.3	2	VC4SLB1CU075-S
100	120.5	101.6	2	VC4SLB1CU100-S
125	141.4	127.1	2	VC4SLB1CU125-S
160	171.3	152.4	2	VC4SLB1CU160-S
200	222.1	203.3	2	VC4SLB1CU200-S
250	272.9	254	2	VC4SLB1CU250-S
300	313.2	300	2	VC4SLB1CU300-S
350	376.6	356.5	2	VC4SLB1CU350-S